
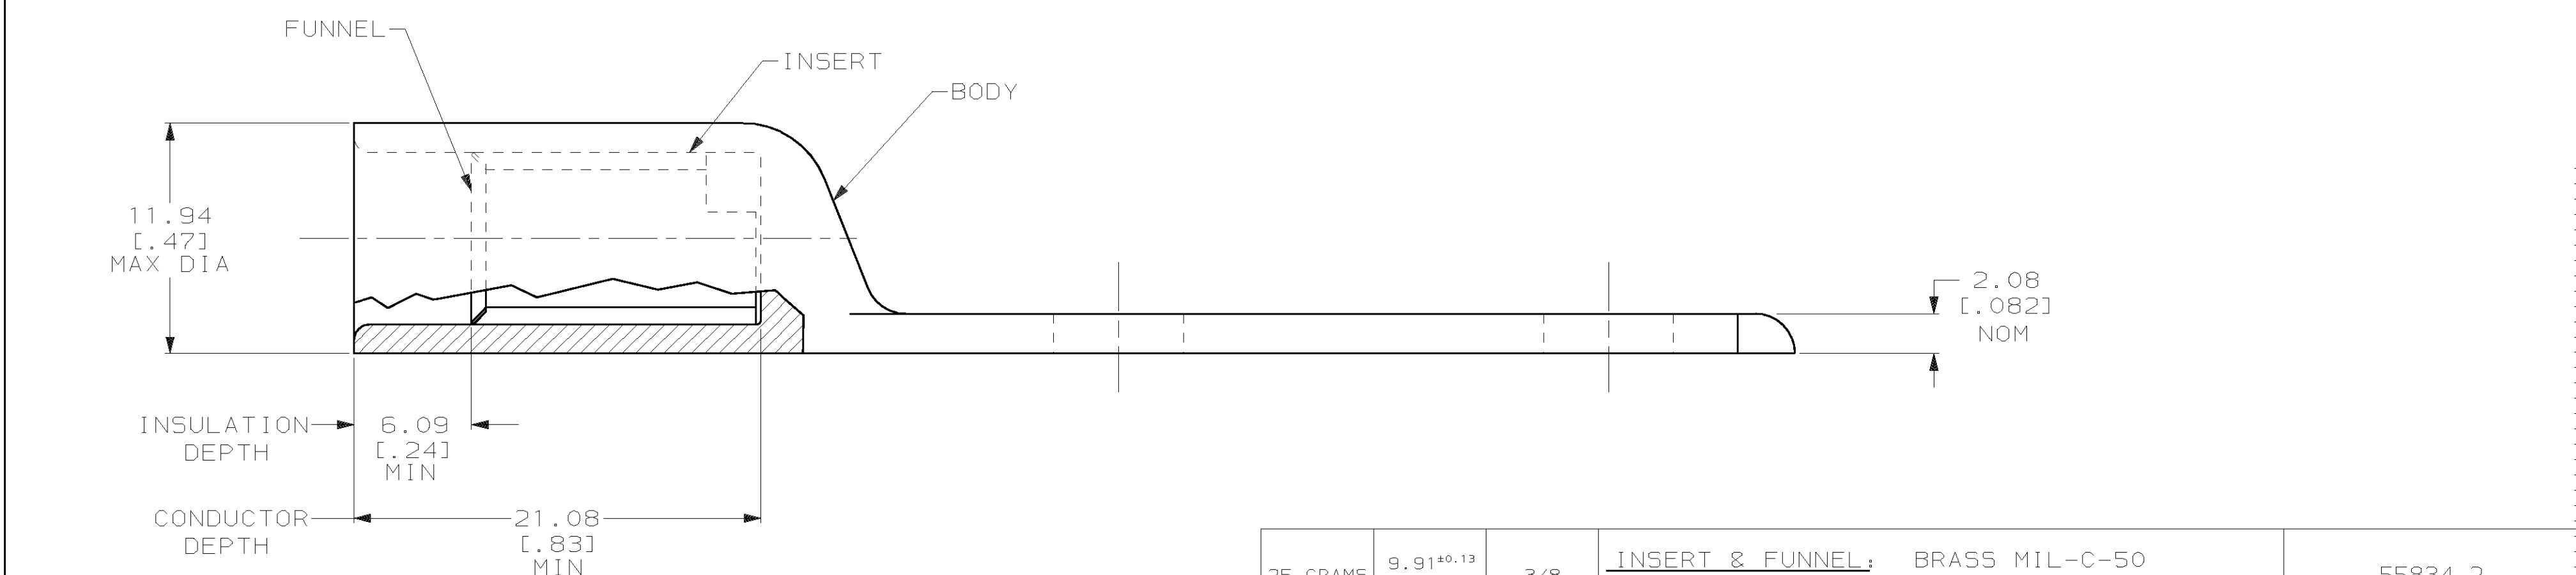


LOC		DIST		P		F		ZONE		LTR		REVISIONS		DATE	APPD
G		86								C		REV PER 0G3A-0659-00		09NOV00	MS

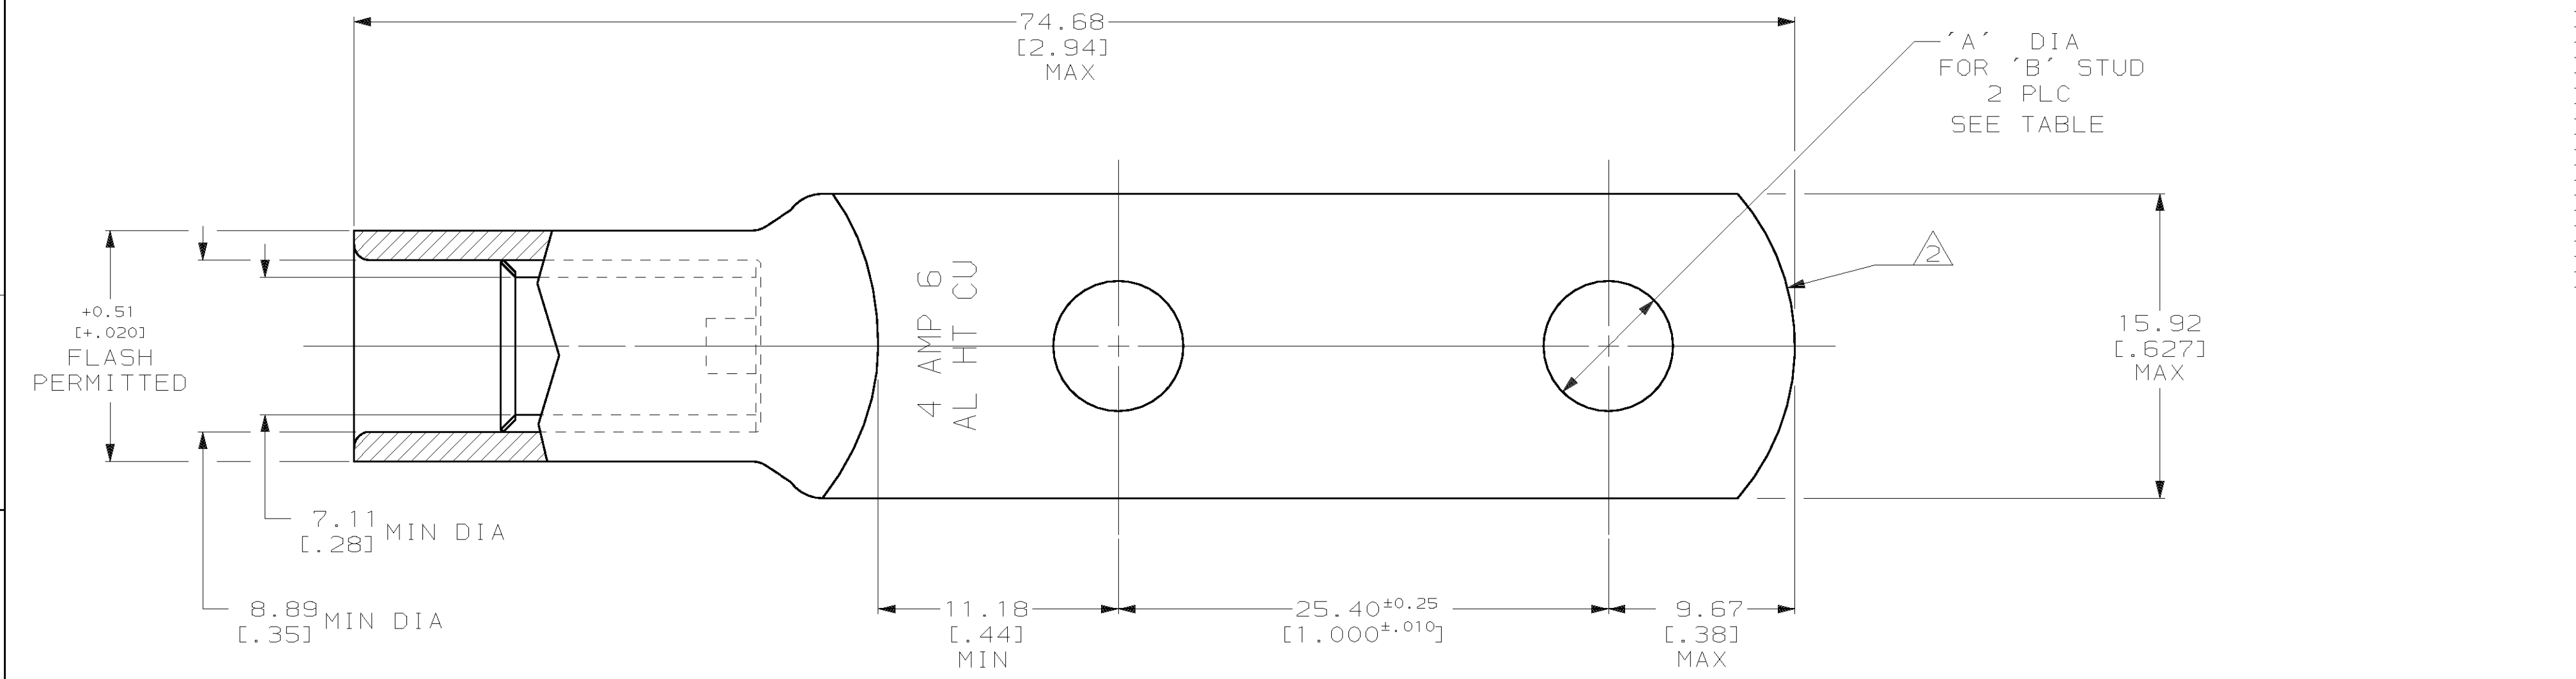

1 WIRE INSULATION: 7.01 [0.276] - 7.75 [0.305] DIA

△ THE TONGUE RADIUS FEATURE IS NOT A TOOLING CONTROLLED DIMENSION AND MAY NOT BE A TRUE RADIUS.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

25 GRAMS	9.91 <sup>±0.13</sup> [.390 <sup>±0.005</sup> ]	3/8	INSERT & FUNNEL: BRASS MIL-C-50 NICKEL PL QQ-N-290 0.00762 [0.00300] AVG THK	55834-2
26 GRAMS	6.73 <sup>±0.08</sup> [.265 <sup>±0.003</sup> ]	1/4		BODY: COPPER ASTM-B187 ANNEALED SILVER PL QQ-S-365 0.00508 [0.00200] MIN THK
WEIGHT	'A'	'B'	MATERIAL & FINISH	PART NO
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON :	DR 6/15/92 DK SCHRUM		AMP Incorporated Harrisburg, PA 17105-3608	
2 PLC DEC ± - 3 PLC DEC ± - ANGLES ± -	CHK 6/16/92 WJ VOCKROTH			
MATERIAL	APPD 6/16/92 AJ KAUFMAN		NAME WIRE TERMINAL, COPALUM™, SEALED, RING TONGUE, HIGH TEMP, WIRE SIZE: 21.75mm <sup>2</sup> [4] ALUMINUM 13.65mm <sup>2</sup> [6] COPPER	
SEE TABLE	APPD 6/16/92 CR RHODS		PRODUCT SPEC 108-11011 TENTATIVE	
FINISH	APPLICATION SPEC 114-2134		SIZE C	CAGE CODE 00779
SEE TABLE	WEIGHT SEE TABLE		DRAWING NO C=55834	SHEET 1 OF 1
			SCALE 4:1	